

SPECIFICATIONS

材质Material:

绝缘体 (Insulator): Polyester (UL94V-0)
Standard: PA6T Black

接触件Contacts: Brass

接触电镀Contact Plating: Au or Sn over $30\mu\text{m}$ Ni

电气性能Electrical Characteristics:

接触电阻Contact Resistance: $20\text{m}\Omega$ Max.




绝缘电阻Insulator Resistance: $1000\text{M}\Omega$ Min.

耐电压Withstanding Voltage: AC 500V


额定电流Current Rating: 1.5 AMP

适用温度范围Operating Temperature: -40°C to $+105^{\circ}\text{C}$



耐温性能Temperature resistance: $255^{\circ}\text{C} \pm 5^{\circ}\text{C}$, 3s-5s max

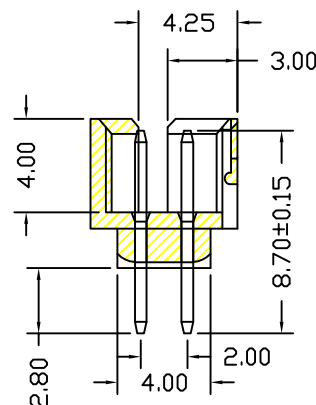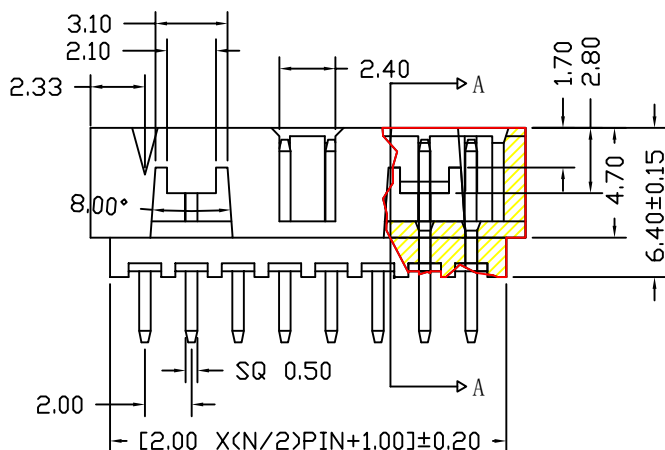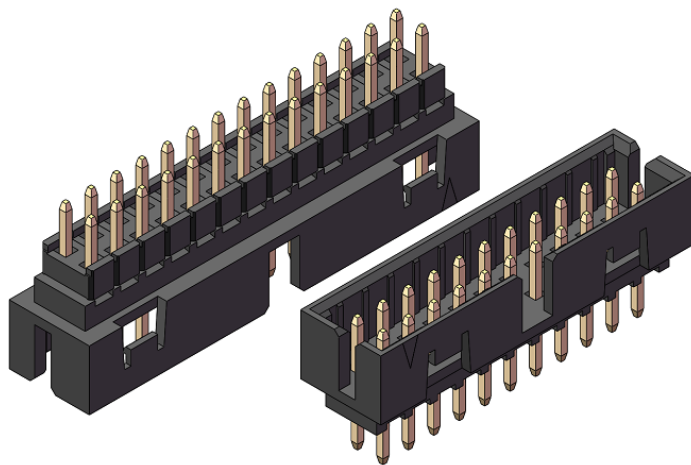

SEC A-A
SCALE 1:1



可加塑胶

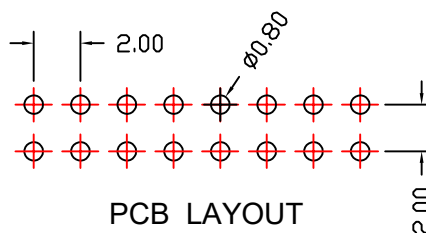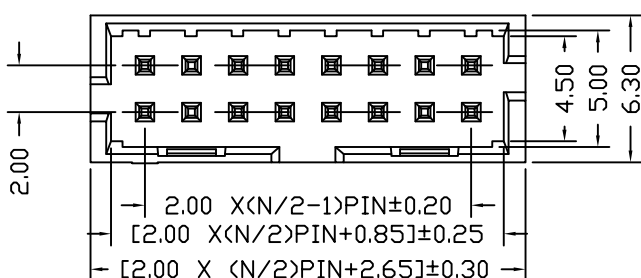

PCB LAYOUT

订购方法 How To Order

2.0筒牛

B

B

XX

S

T/A

G0

XXX

A=常规方形筒牛
B=莫式筒牛

Material Type
A=PBT
B=Nylon-6T
C=LCP
D=Nylon-46

NO. of Positions
Per Row 06 ~ 50

S: Straight (180°)
R: Right Angle (90°)
M: S.M.T

T: TIN (镀锡)
A: Aureate (镀金)

Contact Plating
SN: Tin
G0: Gold Flash
G2: 5u" Gold
G3: 10u" Gold
G4: 15u" Gold
G5: 30u" Gold
S0: Gold Flash/Tin
Standard: G0

Pin Length
XXX=(H-0.5)+PC

常规表达: 型号 (2.0莫式筒牛) - 材质 (PA6T) - 规格 (XXP) - 类型 (S) - 接触件镀层 (XXU") - 尺寸 (PC)

* 其它要求的产品另外说明 Other requests's product on the other hand description